

BRISTAN

Installation Instructions & User Guide

Please leave these instructions
with the end user

TRD HAND01 Range (D1)

Specifications


Dynamic Water Pressure

Min: 0.1 bar Max: 5.0 bar




Maximum Static Pressure: 10.0 bar

Inlet Water Temperature




Maximum Hot 85°C

Inlet Connections




1/2" BSP

Output



Single Function Handset

Pack Contents

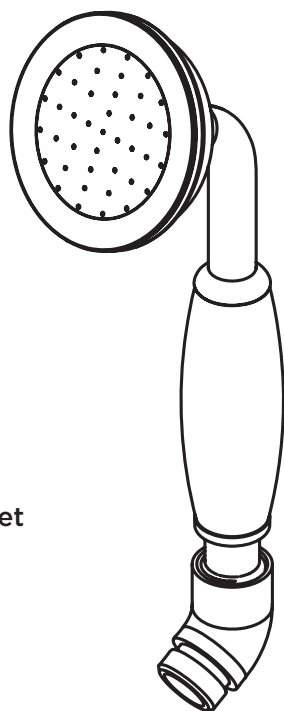

☐x1 Handset

General Cleaning

Bristan products are made from premium materials, with hand polished, PVD, EPD or electroplated finishes. Your product should be regularly cleaned with warm water, a mild pH-neutral liquid soap, and polished with a soft cloth. Any residues from soap, toothpaste, shampoos and shower gels can cause blemishes if not rinsed off straight after use.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

Tools Required for Installation/ Maintenance



O Ring Pick Tool

Prior to Installation

All products manufactured and supplied by Bristan are safe to use provided that they are installed, operated and receive regular maintenance in accordance with these instructions.

This product needs to be installed in accordance with, and meet the requirements of The Water Supply (Water Fittings) Regulations (Northern Ireland) 2009 and The Water Supply (Water Fittings) (Scotland) Byelaws 2014. For full Installation Requirements & Notes (IRN) please visit www.wrasapprovals.co.uk/approvals-directory

Before installing this product the water supply must be thoroughly flushed in order to remove any swarf, solder etc. Full access must be made available for future maintenance/servicing purposes.

This product must not be modified in any way as this will invalidate the guarantee.

Spare Parts



To replace any spare parts for your tap, why not scan the QR Code or visit www.bristan.com and search for your product.



Important

The images shown are for illustrative purposes only.


The handset you have purchased may look different to those pictured in this booklet but will follow the same installation steps.

Your contents page will be specific to your product.

If you find your product or any of its components differ from those shown on the contents page, please contact our customer support.


1

If a sealing/filter washer is supplied with your handset, ensure it is fixed in place before connecting.

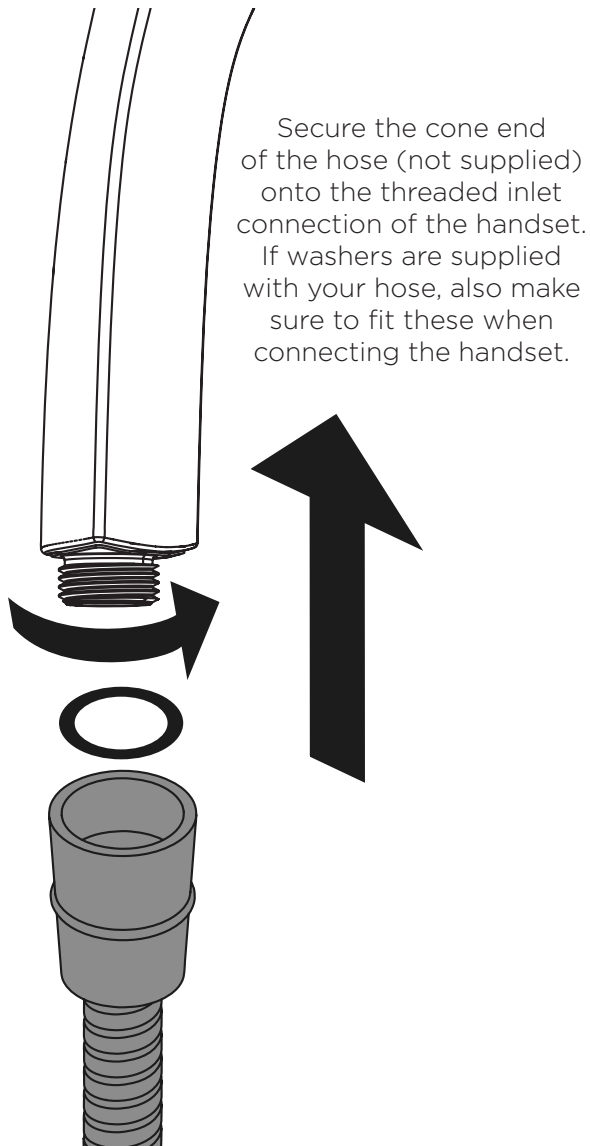

Secure the cone end of the hose (not supplied) onto the threaded inlet connection of the handset. If washers are supplied with your hose, also make sure to fit these when connecting the handset.

2

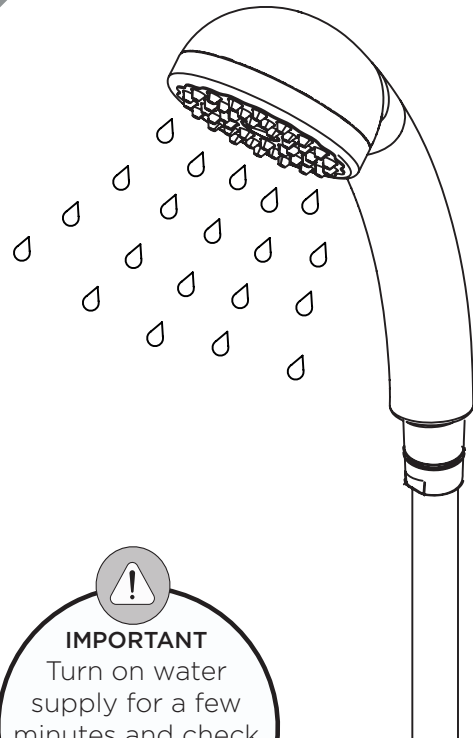

IMPORTANT

Turn on water supply for a few minutes and check all joints and connections for any leaks.


Your handset is now ready to use.

Need a Flow Limiter?

Do you need to limit the flow of your shower, but don't have a flow limiter on your shower or handset?

Try one of our ECO SHW limiters - simply attach between the hose and handset to limit the shower.

Scan the QR code or visit www.bristan.com and search for 'ECO SHW' to see the range.



BRISTAN

Part of **BRISTAN GROUP**

Bristan Group Ltd.
A Masco Company

UK: Bristan Group,
Pooley Hall Drive,
Birch Coppice Business Park,
Dordon, Tamworth
B78 1SG.

EU: Masco Europe S.à.r.l.
14 Rue Strachen
6933 Mensdorf
Luxembourg

Email Us: enquire@bristan.com

Website: www.bristan.com

Call Us: +44330 026 6273

Our Guarantee

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

To start your free guarantee simply scan the QR code and register your product. Alternatively visit www.bristan.com/register.

For any other queries, please call our Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit www.bristan.com/service-centre/guarantees.

