QUBO Tap Range Qubo Bath Shower Mixer Chrome

D5

QB BSM C



Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10-year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps available.

Product Certifications:




WRAS Certificate No.: 240204055 WRAS Expiry Date: 28/02/2029

kiwa approved
\sim
KUKreg4

SEE

KIWA Certificate No: 2402753 KIWA Expiry Date: 22/02/2029

Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Square				
Connection Inlet:	3/4" BSP				
Connection Outlet:	M24 Housed Aerator				
Number of Tap Holes:	2				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.3 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	60°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

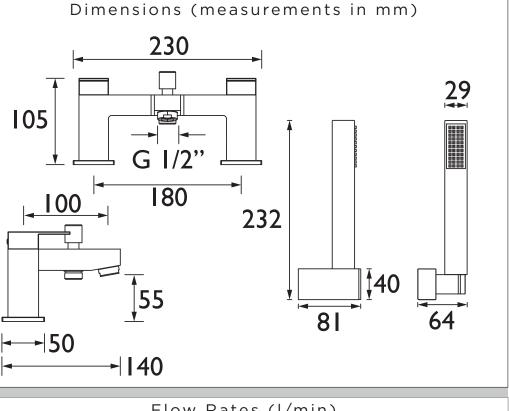

22/02/2029								
	Flow Rates (l/min)							
KUKreg4	System Pressure (bar)	0.3	0.5	1	2	3	5	
Whited Water Label	Through Bath Filler (mixed)	20.6	29.2	40.6	57.4	70.3	90.7	
	Through Handset (mixed)	4.2	5.7	8.7	15.1	18.5	23.8	
TECHNICAL DATA	PLANE SO		B	RIS	ST/	AR		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

RANT

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.