# CRU BSM BB


## CRUZAR Tap Range Cruzar Bath Shower Mixer **Brushed Brass**



#### Features:


- Multi function rub clean • handset - limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend brushed brass finish to make a statement in your bathroom.
- 10 year parts and 1 year labour guarantee for peace of mind.

#### Product Certifications:

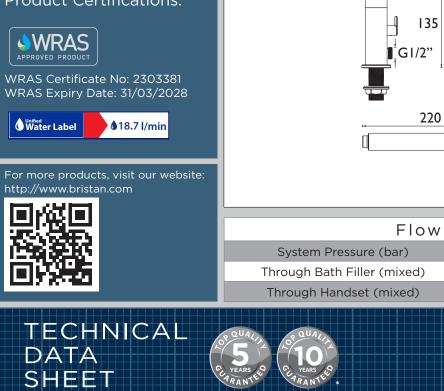

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass; ABS; Stainless Steel			
Mount Type:	Deck			
Handle Type:	Crosshead Handles			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M16 Flow Straightener			
Number of Tap Holes:	2			
Hose Length (mm):	1500			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.5 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

### Dimensions (measurements in mm)



D3

	Flow Rates (I/min)						
	System Pressure (bar)	0.5	1	2	3	5	
	Through Bath Filler (mixed)	12.9	19.2	27.5	32.3	50.4	
	Through Handset (mixed)	6.8	10.1	14.9	18.7	23.8	
TECHNICAL DATA	P QUALLA S QUALLA VEARS Q VEARS Q VEARS Q		BR	<b>IS</b> 1	1A7		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.