MOL BSM BLK

MOLIDA Tap Range Molida Bath Shower Mixer Black




Features:


- Multi function rub clean handset - limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend matt black finish to make a statement in your bathroom.
- 10 year parts and 1 year labour guarantee for peace of mind.

Product Certifications:



Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Lever Handles				
Connection Inlet:	3/4" BSP				
Connection Outlet:	M24 Aerator				
Number of Tap Holes:	2				
Hose Length (mm):	1500				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	60°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				



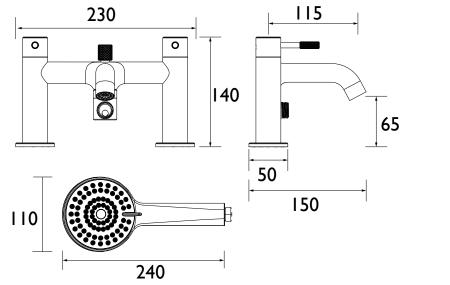

D2

<u>ttp://www.bristan.com</u>							
	Flow Rates (I/min)						
	System Pressure (bar)		0.5	1	2	3	5
	Through Bath Filler (mixed)	12.3	21.6	32.3	44.7	54.8	70.7
E17 2/162	Through Handset (mixed)	3.4	5.8	8.5	12.9	16.5	22.8
TECHNICAL DATA	10° 20041144 (100 000 000 000 000 000 000 000 000 00		B	RE	37/		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

ARANT

a statistical products products products products on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

ARANTE