

# BRISTAN

## Installation Instructions & User Guide

Please leave these instructions  
with the end user

QB BAS C (D1)

### Specifications


#### Dynamic Water Pressure

Min: 0.4 bar Max: 5.0 bar




Maximum Static Pressure: 10.0 bar

#### Inlet Water Temperature

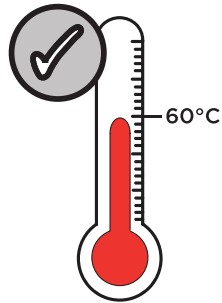


Maximum Hot 60°C

#### Inlet Connections




1/2" BSP  
Flexible Tails

### Spare Parts




To replace any spare parts  
for your tap, why not  
scan the QR Code or  
visit [www.bristan.com](http://www.bristan.com)  
and search for your  
product.

### Pack Contents

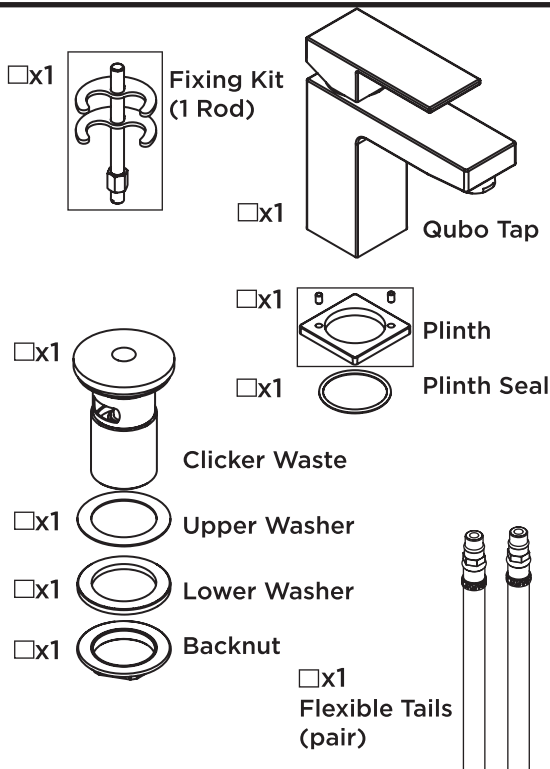

### Operation

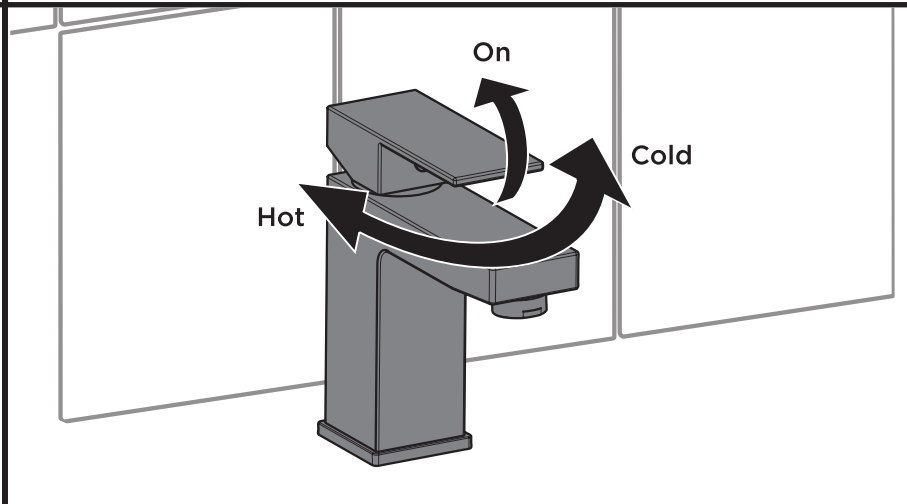

### Tools Required for Installation/ Maintenance




Adjustable Spanner




2.5mm  
Hexagonal Keys



3.5mm  
Flat Head  
Screwdriver



11mm  
Box Spanner  
(fixing rod nut)



27mm  
Box Spanner  
(cartridge)

### Prior to Installation

All products manufactured and supplied by Bristan are safe to use provided that they are installed, operated and receive regular maintenance in accordance with these instructions.

This product needs to be installed in accordance with, and meet the requirements of The Water Supply (Water Fittings) Regulations (Northern Ireland) 2009 and The Water Supply (Water Fittings) (Scotland) Byelaws 2014. For full Installation Requirements & Notes (IRN) please visit [www.wrasapprovals.co.uk/approvals-directory](http://www.wrasapprovals.co.uk/approvals-directory)

Isolation valves must be fitted to the inlet water supplies to ensure ease of future maintenance.

Before installing this product the water supply must be thoroughly flushed in order to remove any swarf, solder etc. Full access must be made available for future maintenance/servicing purposes.

This product must not be modified in any way as this will invalidate the guarantee.



## Important

**The images shown are for illustrative purposes only.**

The tap you have purchased may look different to those pictured in this booklet but will follow the same installation steps.


**Your contents page will be specific to your product.**

If you find your product or any of its components differ from those shown on the contents page, please contact our customer support.

## Installation


### 1

Look underneath the tap body to observe fixing kit rod(s) and tail inlet positions




Depending on the model, the tap will utilise 1 or 2 fixing kit rods. Refer to contents page

### 1 Fixing Rod



### 2 Fixing Rods

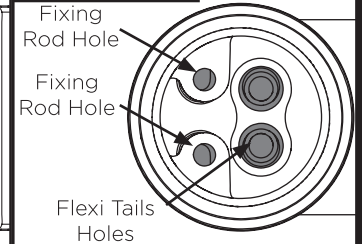


### 2

Screw in the fixing kit rod(s) into the base of the tap




Screw in the flexible tails by hand only.  
**DO NOT OVERTIGHTEN**

Your model may come with a plinth and will either be included pre-attached or loose in the box\*

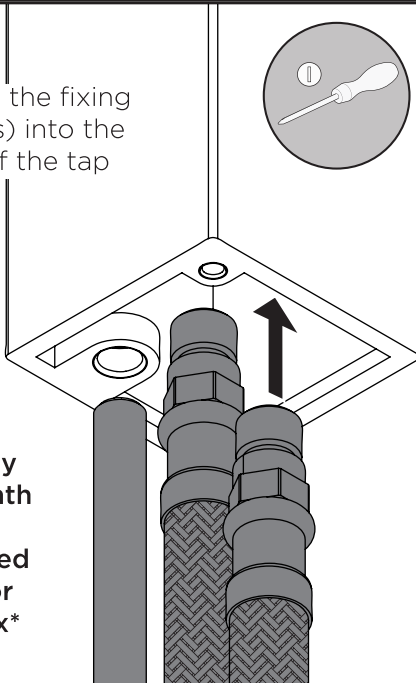


### 2\*

If required, thread the flexible tails and fixing kit rods through the plinth and rubber seal (if loose) and align with tap body



Look for any grub screw holes on the plinth as these may be required to fix it to the tap body


(these can be located underneath the rubber seal)

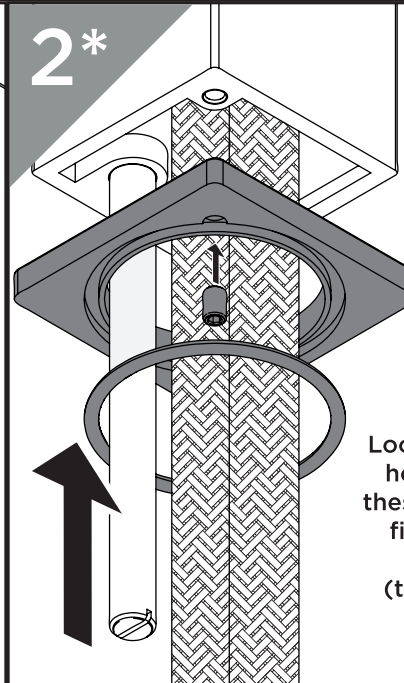

### 3

Thread the flexible tails and fixing kit rods through the basin hole


If the hole is not large enough for both tail ends to fit through, unscrew one of the flexible tails and screw back in from underneath the basin

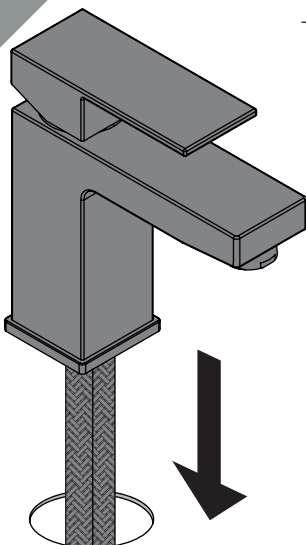

### 4

From underneath the basin, slide the fixing rod(s) through the **rubber gasket first and then the metal c plate**

Align the gasket and c plate, then begin tightening the nut up the rod towards the basin until secure

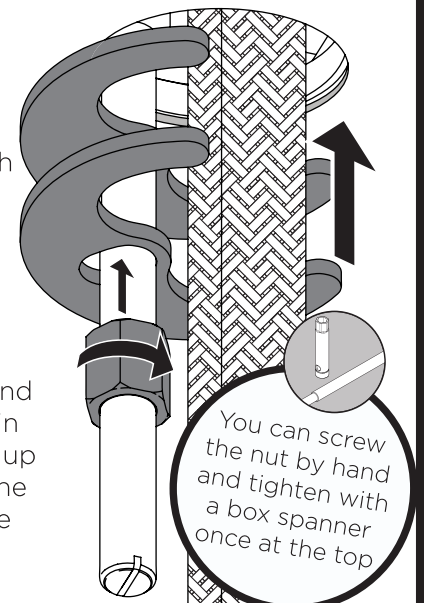

You can screw the nut by hand and tighten with a box spanner once at the top

### 5

Connect the hot and cold water supplies to the flexible tails and turn until tight

Hot on the left, cold on the right

**REMEMBER**  
Refer to the next panel for correct flexible tail positions

Slight bend ✓ 90° angle ✓ Curved round ✓ Kinks ✗ Twists ✗

### 6

**IMPORTANT**  
Turn on water supply for a few minutes and check all joints and connections for any leaks.

Your tap is now ready for use.

## Waste Installation and Operation

### 1

Fit the waste above the basin ensuring the washer is in place.

### 2

Push waste into hole until the outer rim sits flush with the bottom of the basin

Then place the washer from underneath and tighten the backnut to secure the waste to the basin

### 3

Push the centre down to close the waste

Push again to open and release contents of basin

**Your waste is now ready for use.**

## General Cleaning

Bristan products are made from premium materials, with hand polished, electroplated, PVD or EPD finishes.

Your taps or shower should be regularly cleaned with warm water, a mild pH-neutral liquid soap, and polished with a soft cloth. Any residues from soap, toothpaste, shampoos and shower gels can cause blemishes if not rinsed off straight after use.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

# Maintenance - Cartridge/ Valve Replacement

**1** Remove indice by pulling it loose, then undo hex grub screw to remove handle

**2** **IMPORTANT** Isolate the water supply before starting!

Remove the shroud and retaining nut and then lift the cartridge out of the tap  
(Some shrouds may need to be unscrewed by hand before removing)

Using a box spanner will ensure that you can reach the retaining nut if it recessed into the tap body

**3**

Reverse the steps to replace the cartridges/ valves and handles.

# Maintenance - Clean/ Replace Outlet

**1a** **Flow Straightener**

Using an adjustable spanner, unscrew gently to remove the outlet

Observe the outlet and use the corresponding tool

Note that thinner spouts will have open outlets and not be removable

**1b**

If your model comes with one, insert the key tool into the outlet and twist to release it

**Recessed Outlet**

**1c**

Using a coin, insert into the slot on the outlet and twist to release it

**Coin Slot Aerator**

**2**

Check all loose parts for any damage, then soak using a suitable solution to de-scale

**3**

Reverse the steps to replace the outlet

# Love Your Chrome

Bristan offers an effective chrome-friendly cleaning kit for use with your taps and showers. Scan the QR Code or search for 'CLEAN KIT01' on [www.bristan.com](http://www.bristan.com).



## Troubleshooting

Symptom	Cause	Remedy
Low Flow	Partially closed isolation valve.	Open isolation valve.
	Airlock or partial blockage in the supply pipework.	Flush through pipework to ensure removal of debris and any airlocks.
	Partial blockage in the outlet	Remove to Clean and soak in suitable solution.
No hot water or cycling hot and cold	Instantaneous water heater cycles on and off as flow rate or pressure is too low.	Increase water flow rate or pressure through system.
No Flow	Closed isolation valve.	Open isolation valve.
	Mains water supply turned off.	Turn on mains water supply.
Temperatures not corresponding with taps	Inlet pipes have been connected incorrectly	Swap the inlet tails around.

## Notes

Please use this space for any notes you or your installer may have regarding the installation/plumbing of this product.

## Contact Us

### **BRISTAN**

**Bristan Group Ltd.**

**UK:** Bristan Group, B78 1SG.

**EU:** Masco Europe S.à.r.l.  
14 Rue Strachen  
6933 Mensdorf  
Luxembourg

**Customer Service:** +44330 026 6273

**Web:** [www.bristan.com](http://www.bristan.com)

**Email:** [enquire@bristan.com](mailto:enquire@bristan.com)

**A Masco Company**

## Servicing Your Tap

We recommend servicing your tap at least once every year to prolong its life.

To see a video showing how to remove the cartridge for servicing, scan the QR code with your smart phone or tablet.

Alternatively visit [www.youtube.com/BristanTV](http://www.youtube.com/BristanTV)



## Our Guarantee

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

Your guarantee starts from the purchase of your product, but you can still benefit from registering it for easier identification in the unlikely event of a manufacturing fault, please visit [www.bristan.com/register](http://www.bristan.com/register)

For any other queries, please call Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit [www.bristan.com/service-centre/guarantees](http://www.bristan.com/service-centre/guarantees).

