LIS BAS BLK



Specification	
Product Type:	Bathroom Taps
Main Construction Material:	Brass; Zinc Alloy
Mount Type:	Deck
Handle Type:	Round
Connection Inlet:	1/2" BSP Flexible Tails
Connection Outlet:	M24 5lpm Flow Limited Aerator
Number of Tap Holes:	1
Valve/Cartridge Type:	26mm Single Lever Cartridge
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.5 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	60°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

150

Features:

- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Everything you need in the box including flexible and clicker waste so nothing to buy separately.
- Long life ceramic cartridge for added durability and smooth control.
- On-trend matt black finish to make a statement in your bathroom.
- 10 year parts and 1 year labour guarantee for peace of mind.

Product Certifications:





WRAS Certificate No: 240903011 WRAS Expirey Date: 30/09/2029



For more products, visit our website: http://www.bristan.com





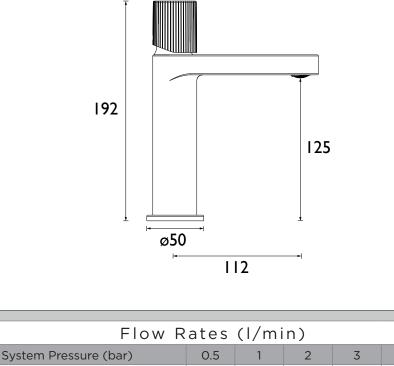

3.9

4.6

2.8

4

5

4.8

5

5



LIS BAS BLK (mixed)

Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.